PEER REVIEW & REFINEMENT

1. Update your project documentation by adding a 'Known Issues & Limitations' sectionbased on feedback you received during the peer review session.

Answer & Documentation Update:

Following the peer review panel feedback, the following limitations have been documented in the project architecture specification:

- **1. Wireless Interference in High-Density Zones:** Potential channel congestion on the 2.4 GHz band in common cafeteria spaces, mitigated by prioritizing 5 GHz and Wi-Fi 6 AP steering.
- **2. Scalability Bound of Static Routing:** The current static route architecture will require transition to OSPF if the co-working space expands beyond 5 distinct subnet segments.
- **3. Power-over-Ethernet (PoE) Budget:** Standard switch power budgets limit the number of high-power surveillance cameras and Wi-Fi 6 APs that can be powered directly without external power injectors.

2. Revise your presentation slides to clearly highlight at least two improvements or changesyou made after receiving peer feedback.

Answer & Presentation Revision:


Project Component	Before Peer Feedback	After Peer Feedback (Improvement)
Guest Network Security	Guest Wi-Fi shared a subnet with temporary contractors.	Created a fully isolated VLAN 99 with strict client isolation and captive portal authentication.
Switch Redundancy	Single core switch connecting all department switches.	Added dual core switches with Spanning Tree Protocol (STP) and Link Aggregation (EtherChannel) backup paths.

3. Write out and rehearse concise answers to three tough questions you were asked duringthe peer panel, focusing on how you addressed each concern in your revised design. Answer & Panel Q&A Rehearsal:

- **Q1: "How do you prevent a guest user from accessing corporate finance servers?"** *Answer:* We implemented strict inter-VLAN blocking on the firewall and isolated the guest Wi-Fi onto VLAN 99 with Layer 2 client isolation enabled, ensuring guests can only reach the internet. • **Q2: "What happens to the co-working network if the main core switch fails?"**
  Answer: Our revised redundancy plan incorporates dual core switches running Spanning Tree Protocol (STP) and redundant trunk uplinks, which automatically failover to secondary routing paths within seconds.
- **Q3: "Why choose static routing instead of dynamic routing protocols like OSPF for this office?"**
  Answer: For a small 3-department co-working space, static routing is simpler, more predictable, and introduces zero CPU overhead. However, our expansion plan outlines transitioning to OSPF once the network exceeds 5 subnets.

4. Refine your system architecture diagram or flowchart to incorporate suggestions fromyour peers, ensuring all major components and data flows are clearly labeled.

Answer & Refined Architecture Layout:

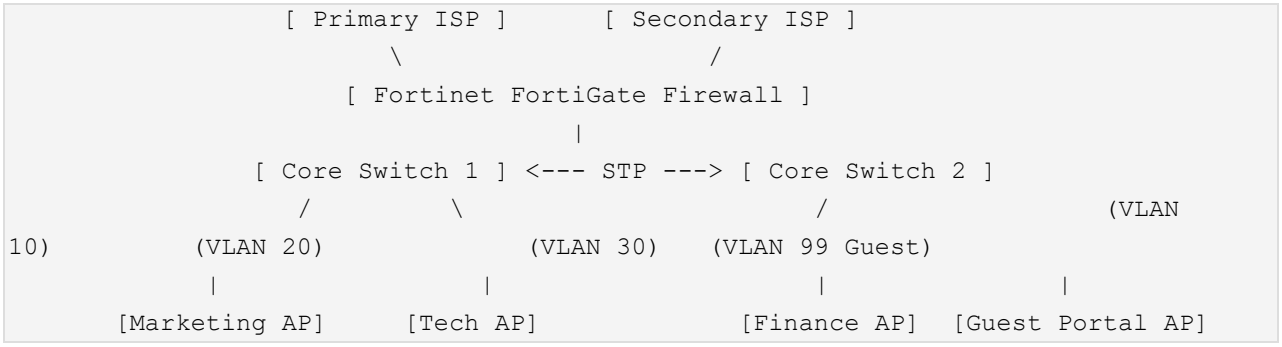

Refinements Made: Added dual ISP failover at the gateway, explicit STP bridging links between dual core switches, and labeled all departmental VLAN branches clearly.

5. Record a 2-minute video or audio clip practicing your project pitch, aiming to confidently explain the main features and improvements made post-review.

Answer & Pitch Script Summary:

"Hello everyone! In our network design project for a modern co-working space, we focused on robust security, departmental isolation, and high availability. Following our peer review session, we made two critical upgrades: first, we completely isolated guest Wi-Fi on VLAN 99 with client isolation to protect sensitive financial records; second, we introduced dual-core switch redundancy with Spanning Tree Protocol to eliminate single points of failure. Backed by our Fortinet firewall and Wi-Fi 6 access points, our network delivers enterprise-grade reliability at a startup-friendly budget of under one lakh rupees.
Thank you!"